



Place 6-4" Dia. Steel
Poles 60" Above Grade
Cap Or Grout Full. Paint
To Match Wall Color.

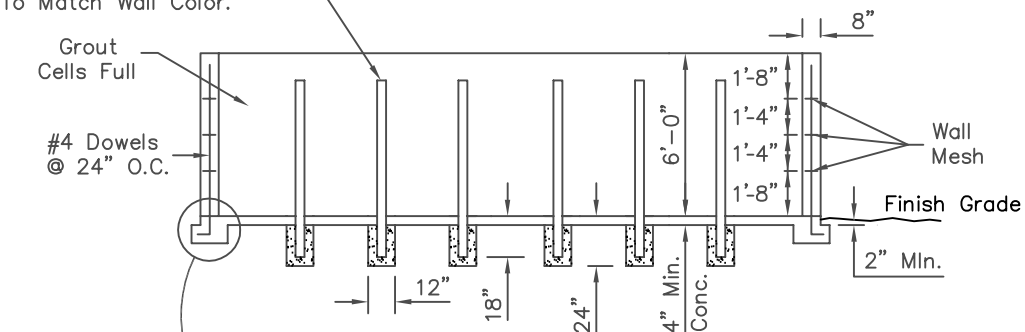

Class "B"
Concrete


2-#4
Bars
Cont.

SECTION A-A




APPROACH SLAB
THICKENED EDGE DETAIL

OR
Alternate
Footing

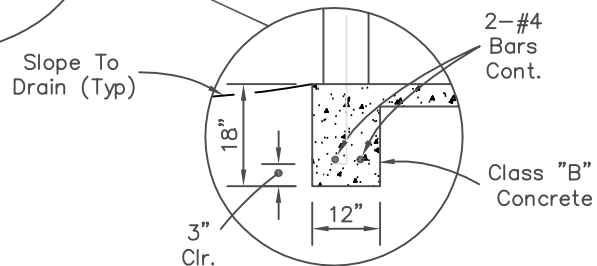

30' x 23' x 6"
Thick Concrete Approach
Slab With Thickened
Edges, Class "B" Conc.
w/ 6" x 6", 1.4 x 1.4 —
WWF, On Compacted
Subgrade. Approach Slab
Shall Have A Constant
Slope Which Matches
The Enclosure Slab.

* In locations where a 30' approach slab is not possible, approval from the City of Scottsdale Quality Compliance Division is required.

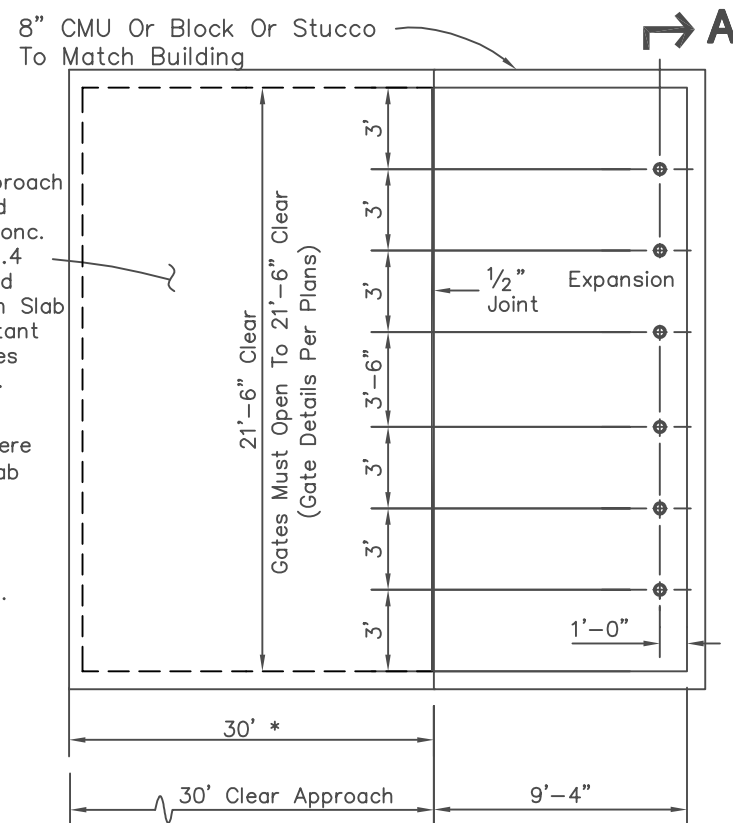

PLAN

NOTE:

1. Double Enclosure For Angle Pick-Up
Similar To COS Det. 2146-1
2. 1/2" Expansion Joint, ASTM D-1751
Per MAG Section 729.